

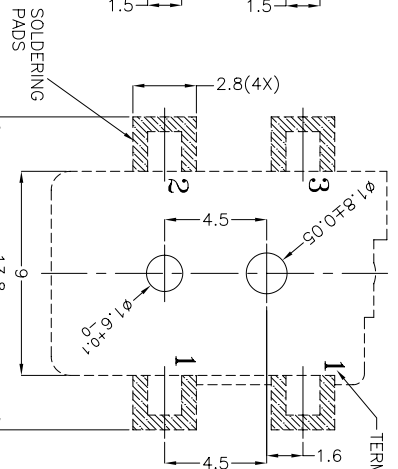
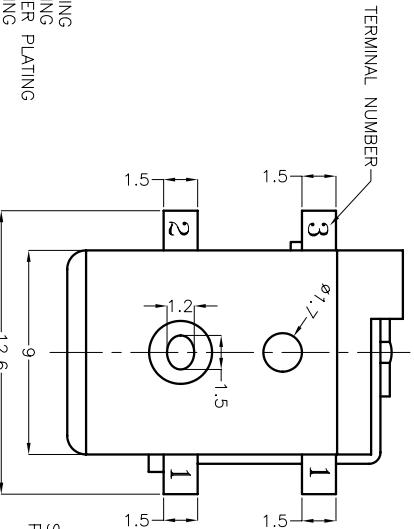
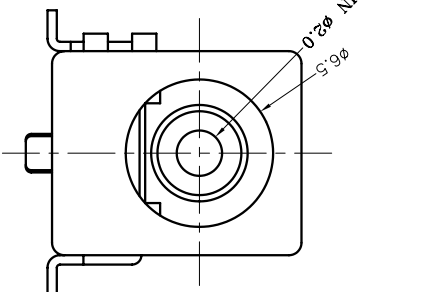
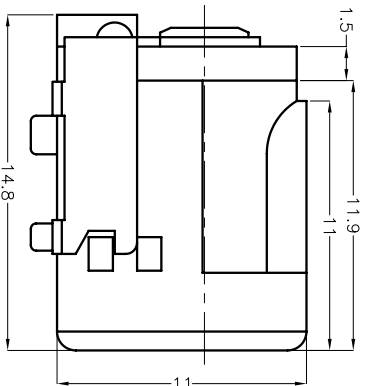
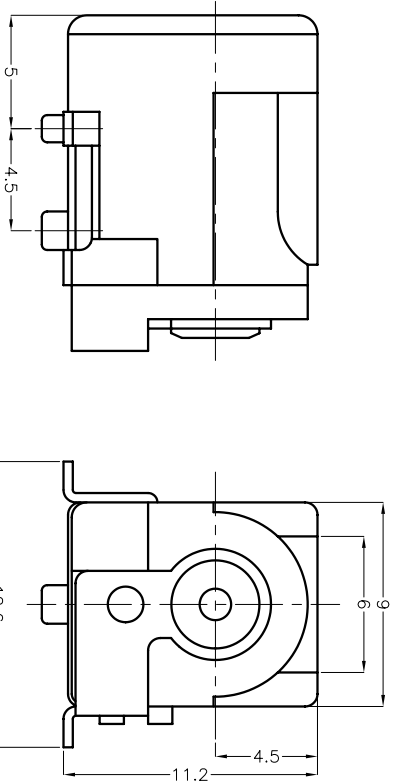


SPECIFICATIONS
 RATING: 12V DC @ 1A
 CONTACT RESISTANCE: 30m OHMS MAX
 INSULATION RESISTANCE: 50m OHMS MIN. 500V DC
 VOLTAGE WITHSTAND: 500 VAC R.M.S. FOR 1 MINUTE
 LIFE: 3,500 CYCLES MIN

MODEL NO.	PJ-002A-SMT
SCHEMATIC	

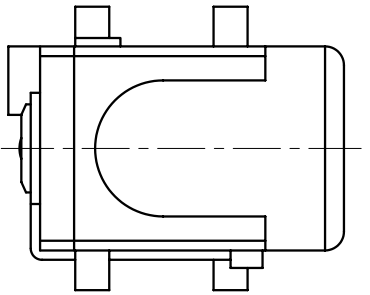

MATERIALS
 CENTER PIN: BRASS-NICKEL PLATING
 TERMINAL-1: BRASS-SILVER PLATING
 TERMINAL-2: COPPER ALLOY-SILVER PLATING
 TERMINAL-3: BRASS-SILVER PLATING
 COVER: NYLON 6T
 HOUSING: NYLON 6T

PC FILE NAME:
 PJ002ASMT.DWG

COPYRIGHT 1999 BY CUI STACK, INC.

PCB LAYOUT
 (BOTTOM VIEW)



CUI STACK

9615 SW Allen, Suite 103
 Beaverton, OR 97005
 Phone: (503) 643-4899
 800-275-4899
 Fax: (503) 643-6129
 Website: www.cuistack.com

TITLE: 2.0mm SURFACE MOUNT POWER JACK

PART NO. PJ-002A-SMT UNITS: Millimeters

SCALE: 3X
 DRAWN BY: Todd R. White
 APPROVED BY: