

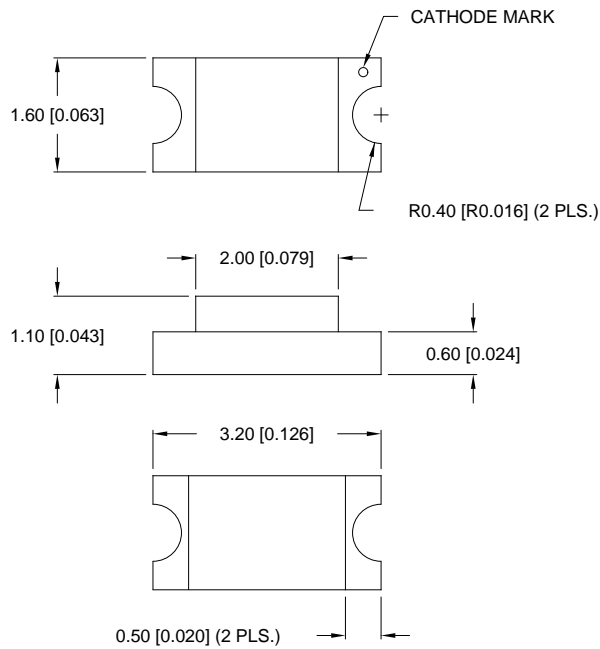

DATE

REVISIONS

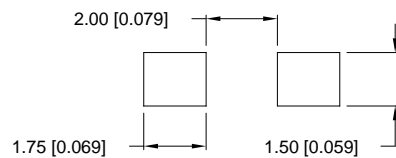


REV

DRAWING NUMBER
SML-LX1206XC-TR

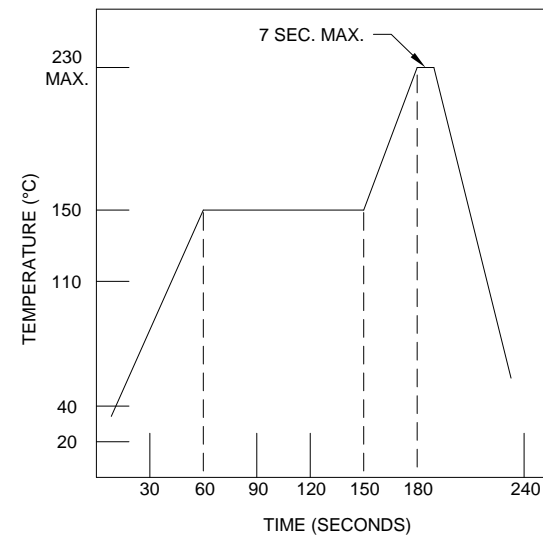
REV

ANODE  CATHODE

RECOMMENDED PAD SIZE

TAPE DIRECTION 

SOLDER PROFILE



RELIABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELLEN ROAD
PALATINE, ILLINOIS 60067
(847) 359-2790

CONFIDENTIAL INFORMATION

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INCORPORATED. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INCORPORATED, THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

DATE:

DWN:

CHK'D:

APPD:

SCALE:

N/A

3.2mm x 1.6mm PCB, SURFACE MOUNT LED, 'X' COLOR,
WATER CLEAR LENS, TAPE AND REEL.

PAGE 1 OF 1

DRAWING NUMBER
SML-LX1206XC-TR

REV

UNLESS OTHERWISE SPECIFIED TOLERANCE IS $\pm 0.25\text{mm}$ ($\pm 0.010''$)